


PT-2470

TZ-Tape



Upon registration

## Hand-held Electronic Labeller

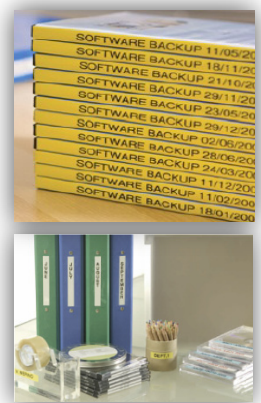

### Copy

Perfect for the busy office or warehouse! With its rugged, rubber-protected design the PT-2470 produces equally durable labels up to 24mm wide using Brother's hard-wearing TZ tape. It's simple keyboard layout includes useful symbols too, with an easy-to-read backlit LCD screen. It's so versatile, you'll find it invaluable for getting organised!

- Durable – labels up to 24mm, able to handle extreme conditions
- Easy to carry lightweight design
- Easy to use ABC keyboard
- Easy-to-read LCD screen
- Convenient built-in cutter
- Save time with up to 10mm per second printing
- Extra versatility – print labels to 6, 9, 12, 18 & 24mm
- Conveniently comes with 24mm black on white tape (8m)

### What's in the Box

- 1x 24mm Tape (as advised above)
- User Guide
- Software Installation Guide
- USB cable
- CD ROM

PT-2470 Technical Specification	
Housing Dimensions	235(D) x 134(W) x 78(H) mm
Housing Weight	0.61 kg
Housing Design	Handheld Type
Housing Color	White/ Black
Key Board	ABCD Layout (UK, Fre, Ger version)
Number of Keys	56 keys
Cutter	Manual
Auto Half Cutter	No
Power	6 x AA Alkaline (LR6) Batteries (not included) 6 x AA Rechargeable Batteries (not included) AC-Adapter(AD-18ES UK/AD-18ES EU) (Optional)
LCD	132 x 48 dots Graphic Display with Backlight
Attachments	User's Guide TZ-Tape (24mm Black on White 4M)
Tape Type	TZ Tape
Tape Size	6 / 9 / 12 / 18 / 24mm
Print Head	180 dpi / 18.1mm
Print Speed	10 mm / sec.
Strap / Handle	No
Computer Interface	No
LCD Mylar	No
Mylar Sticker	No
Built in Fonts	Helsinki
Title Fonts	No
Number of characters	373 chrs
Number symbols	164 chrs
Max. Print Height	Max. 18.0mm
CHR Size (Pts)	Auto, 6, 9, 12, 18, 24, 36, 48
CHR Widths	Normal / Narrow / Thin / Wide
Label Length Setting	6mm - 999mm
Multi - Line	Max. 7 lines
Multi - Block	Max. 50 blocks
Tab Function	No
Text Buffer	Approx. 500 chrs
Memory	Max. 2,000 chrs
Type Style	Normal / Bold / Outline / Italic / Italic Bold / Italic Outline
Framing & Fill Pattern	Frame: 15 Pattern: 0
Barcode	Yes ( CODE39, CODE128, EAN8, EAN13, EAN128, UPC-A, UPC-E, I-2/5(ITF), CODABAR )
Copy Printing	1 - 99
Delete	Backspace
Underline / Strikeout	No
Tape Margin Settings	2mm - 99mm

PT-2470 Technical Specification, cont.	
<b>Cut &amp; Feed Settings</b>	Large Margin / Small Margin / Chain / No Cut
<b>Horizontal Alignment</b>	Left / Right / Center / Justify
<b>Vertical Alignment</b>	No
<b>Mirror Printing</b>	Yes
<b>Text Insert</b>	Yes
<b>Vertical Printing</b>	Yes
<b>Numbering</b>	1 - 99
<b>Block Printing</b>	Yes
<b>Split Printing</b>	No
<b>Database Printing</b>	Yes
<b>Auto Formats</b>	10 Formats
<b>Battery Weak Display</b>	Yes
<b>LCD language change</b>	Yes (English/Spanish/French/Portuguese/German/Dutch/Italian/ Danish/Swedish/Norwegian/Finnish)
<b>Unit Change(cm / inch)</b>	Yes
<b>Auto Power Off</b>	5 minutes
<b>LCD Contrast Setting</b>	Yes
<b>Print Image Preview</b>	No (Only Layout Preview)
<b>Transfer Function</b>	No
<b>Label Type Setting</b>	Normal Rotate Rotate & Repeat Port Panel Panel 2 Flag Vertical